



D Dalmacija Klima d.o.o.

**MANUFACTURING EQUIPMENT AND DEVICES FOR
INDUSTRIAL COOLING AND AIR CONDITIONING**

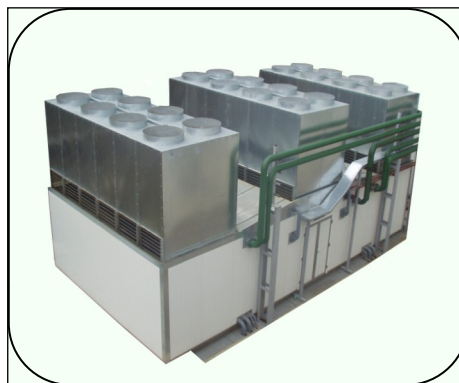

CHILLERS

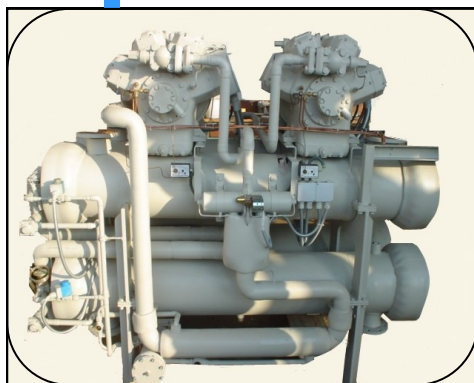

E-mail: mail@dalmacija-klima.com



Web: www.dalmacija-klima.com



COMPANY PROFILE:

Dalmacija klima d.o.o. was founded in 1984 as a repair and maintenance shop for industrial and commercial cooling systems and air condition devices.

In 1989 our workshop grows into the company with business philosophy based on maintaining high degree of quality, following and adoption of new technologies of world trends.

Long term practical experience, high-professional and trained personal are the right foundation for developing our devices and their production. Our advantage is flexibility and possibility to adjust to each specific demand of our clients. Address us with confidence, we will offer you optimal solution in industrial processing cooling system, air-cons, heath-waste management and soon...

We realize projects from an idea to its complete-function – “key into a hand”. Our products are famous for their longevity, reliability, low expences of maintenance, economy and ecological acceptance. We have our long-term experience standing for us confirmed by our pleased clients.

Using ecologically acceptable cooling media in our devices Dalmacija Klima contributes environment protection. To protect ozone when repairing devices we put cooling media into suitable containers. After being repaired, media is cleaned and returned into device. By efficient and fast interventions our trained team can handle and solve the most complicated problems that can occur when using different equipment and devices.

CONTACTS

Tel: 385/21 495-949
Fax: 385/21 495-948
Tel/Fax: 385/21 374-421

REFERENCES

PHR RUSSIA
EURO-APS
VETROPACK-HUM NA SUTLI
STRAZAPLASTIKA-HUM NA SUTLI
KAPLAST-VOJNIC
AD PLASTIK-SOLIN
TEHNOS-SLOVENIJA
HOTEL “PETKA” DUBROVNIK
HOTEL “ARGENTINA” DUBROVNIK
HOTEL “PARK” DUBROVNIK
HOTEL “LE MERIDIEN LAV” SPLIT
HOTEL “GLOBO” SPLIT

RADIATOR FACTORY “LIPOVICA”
NCP SIBENIK
MARINA-KASTELA
PURIS-PAZIN
CEMEX-KASTEL SUCURAC
HEP-OBROVAC
CETINKA-TRILJ
MOLVIK-SAMOBOR
NET FACTORY-BIOGRAD
HLADNJACA “TRAST” SPLIT
KBC-SPLIT

PRODUCTS

AIR TO AIR CHILLERS




Page. 1-4

AIR TO WATER CHILLERS



Page. 5-9

WATER TO WATER CHILLERS



Page. 10-13

POWER SUPPLY FOR ALL PRODUCTS

380V~3N/50Hz



Dalmacija Klima d.o.o.

AIR TO AIR CHILLERS

TECHNICAL SPECIFICATIONS

MODEL		0010	0015	0020	0030	0035	0040	0050	0065	0055	0070
COOLING CAPACITY	kW	10,78	15,82	19,46	27,83	34,43	42,37	53,81	64,32	55,66	68,86
NUMBER OF FREON CIRCUITS	No	1	1	1	1	1	1	1	1	1/2	1/2
NUMBER OF COMPRESSORS/CIRCUITS	No	1	1	1	1	1	1	1	1	2	2
AIR FLOW RATE ON AGGREGATE UNIT	m³/h	3219	6013	7398	10580	13088	16108	20455	24450	21160	26176
AIR FLOW RATE ON EVAPORATOR UNIT	m³/h	3219	6013	7398	10580	13088	16108	20455	24450	21160	26176
MAXIMUM DISTANCE	m	50	50	50	50	50	50	50	50	50	50
MAXIMUM ALTITUDE	m	12	12	12	12	12	12	12	12	12	12
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C
NOISE LEVEL	db	65	65	65	65	65	65	65	66	66	66
TOTAL INPUT POWER	kW	3,32	4,66	6,03	8,55	10,56	13	16,03	19,11	3,32	
WEIGHT	kg	166	169	327	398	459	512	564	645	670	705

MODEL		0085	0105	0130	0067	0080	0100	0125	0160	0190	0063
COOLING CAPACITY	kW	84,74	107,62	128,64	67,32	83,49	103,29	127,11	161,43	192,96	63,28
NUMBER OF FREON CIRCUITS	No	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
NUMBER OF COMPRESSORS/CIRCUITS	No	2	2	2	3	3	3	3	3	3	4
AIR FLOW RATE ON AGGREGATE UNIT	m³/h	32216	40910	48900	20102	32604	40338	49641	63000	75357	18896
AIR FLOW RATE ON EVAPORATOR UNIT	m³/h	32216	40910	48900	20102	32604	40338	49641	63000	75357	18896
MAXIMUM DISTANCE	m	50	50	50	50	50	50	50	50	50	50
MAXIMUM ALTITUDE	m	12	12	12	12	12	12	12	12	12	12
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C
NOISE LEVEL	db	66	67	67	66	66	67	67	67	67	66
TOTAL INPUT POWER	kW										
WEIGHT	kg	890	1075	1137	916	1118	1215	1290	1870	2656	1072

MODEL		0071	0075	0095	0110	0140	0170	0215	0260
COOLING CAPACITY	kW	71,52	77,84	96,08	111,3	137,72	169,5	215,2	257,3
NUMBER OF FREON CIRCUITS	No	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
NUMBER OF COMPRESSORS/CIRCUITS	No	4	4	4	4	4	4	4	4
AIR FLOW RATE ON AGGREGATE UNIT	m³/h	21356	23241	28689	33233	41115	50600	64260	76315
AIR FLOW RATE ON EVAPORATOR UNIT	m³/h	21356	23241	28689	33233	41115	50600	64260	76315
MAXIMUM DISTANCE	m	50	50	50	50	50	50	50	50
MAXIMUM ALTITUDE	m	12	12	12	12	12	12	12	12
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C
NOISE LEVEL	db	66	66	66	67	67	67	68	68
TOTAL INPUT POWER	kW								
WEIGHT	kg	1195	1240	1383	1406	1436	2179	3072	3237

THE TECHNICAL DATA IN THIS DOCUMENT ARE NOT BINDING . DALMACIJA KLIMA RESERVES THE RIGHT TO MAKE WHATEVER MODIFICATIONS IT DEEMS NECESSARY TO IMPROVE THE PRODUCT AT ANY TIME.



Dalmacija Klima d.o.o.

AIR TO AIR CHILLERS

OPTIONS AND ACCESSORIES

MODEL		0010	0015	0020	0030	0035	0040	0050	0055	0060	0063	0065	0067
LOW NOISE VERSION	T	•	•	•	•	•	•	•	•	•	•	•	•
HERMETIC COMPRESSOR	H	•	•	•	•	•	•	•	•	•	•	•	•
SEMI-HERMETIC COMPRESSOR		•	•	•	•	•	•	•	•	•	•	•	•
AXIAL FANS	A	X	X	X	X	X	X	X	X	X	X	X	X
RADIAL FANS	R	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R134A	1	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R407C	2	X	X	X	X	X	X	X	X	X	X	X	X
REFRIGERANT R410A	3	•	•	•	•	•	•	•	•	•	•	•	•
PLATE HEAT EXCHANGER IN PRIMARY CIRCUIT	P	•	•	•	•	•	•	•	•	•	•	•	•
FINNED HEAT EXCHANGER IN PRIMARY CIRCUIT	L	•	•	•	•	•	•	•	•	•	•	•	•
TUBE HEAT EXCHANGER IN PRIMARY CIRCUIT	C	X	X	X	X	X	X	X	X	X	X	X	X
WITH PARTIAL RECUPERATORS	D	•	•	•	•	•	•	•	•	•	•	•	•
WITH TOTAL RECUPERATORS	M	•	•	•	•	•	•	•	•	•	•	•	•
WITH HYDRO BLOCK	B	•	•	•	•	•	•	•	•	•	•	•	•
REMOTE CONTROL PANEL	N	•	•	•	•	•	•	•	•	•	•	•	•
WITH REACTIVE POWER COMPENSATOR	J	•	•	•	•	•	•	•	•	•	•	•	•

MODEL		0070	0071	0075	0080	0085	0095	0100	0105	0110	0125	0130	0140
LOW NOISE VERSION	T	•	•	•	•	•	•	•	•	•	•	•	•
HERMETIC COMPRESSOR	H	•	•	•	•	•	•	•	•	•	•	•	•
SEMI-HERMETIC COMPRESSOR		•	•	•	•	•	•	•	•	•	•	•	•
AXIAL FANS	A	X	X	X	X	X	X	X	X	X	X	X	X
RADIAL FANS	R	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R134A	1	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R407C	2	X	X	X	X	X	X	X	X	X	X	X	X
REFRIGERANT R410A	3	•	•	•	•	•	•	•	•	•	•	•	•
PLATE HEAT EXCHANGER IN PRIMARY CIRCUIT	P	•	•	•	•	•	•	•	•	•	•	•	•
FINNED HEAT EXCHANGER IN PRIMARY CIRCUIT	L	•	•	•	•	•	•	•	•	•	•	•	•
TUBE HEAT EXCHANGER IN PRIMARY CIRCUIT	C	X	X	X	X	X	X	X	X	X	X	X	X
WITH PARTIAL RECUPERATORS	D	•	•	•	•	•	•	•	•	•	•	•	•
WITH TOTAL RECUPERATORS	M	•	•	•	•	•	•	•	•	•	•	•	•
WITH HYDRO BLOCK	B	•	•	•	•	•	•	•	•	•	•	•	•
REMOTE CONTROL PANEL	N	•	•	•	•	•	•	•	•	•	•	•	•
WITH REACTIVE POWER COMPENSATOR	J	•	•	•	•	•	•	•	•	•	•	•	•

- X STANDARD**
• ACCESSORIES



Dalmacija Klima d.o.o.

AIR TO AIR CHILLERS


OPTIONS AND ACCESSORIES

MODEL		0160	0170	0190	0215	0260
LOW NOISE VERSION	T	•	•	•	•	•
HERMETIC COMPRESSOR	H	•	•	•	•	•
SEMI-HERMETIC COMPRESSOR		•	•	•	•	•
AXIAL FANS	A	X	X	X	X	X
RADIAL FANS	R	•	•	•	•	•
REFRIGERANT R134A	1	•	•	•	•	•
REFRIGERANT R407C	2	X	X	X	X	X
REFRIGERANT R410A	3	•	•	•	•	•
PLATE HEAT EXCHANGER IN PRIMARY CIRCUIT	P	•	•	•	•	•
FINNED HEAT EXCHANGER IN PRIMARY CIRCUIT	L	•	•	•	•	•
TUBE HEAT EXCHANGER IN PRIMARY CIRCUIT	C	X	X	X	X	X
WITH PARTIAL RECUPERATORS	D	•	•	•	•	•
WITH TOTAL RECUPERATORS	M	•	•	•	•	•
WITH HYDRO BLOCK	B	•	•	•	•	•
REMOTE CONTROL PANEL	N	•	•	•	•	•
WITH REACTIVE POWER COMPENSATOR	J	•	•	•	•	•

X STANDARD

• ACCESSORIES

DIMENSIONS

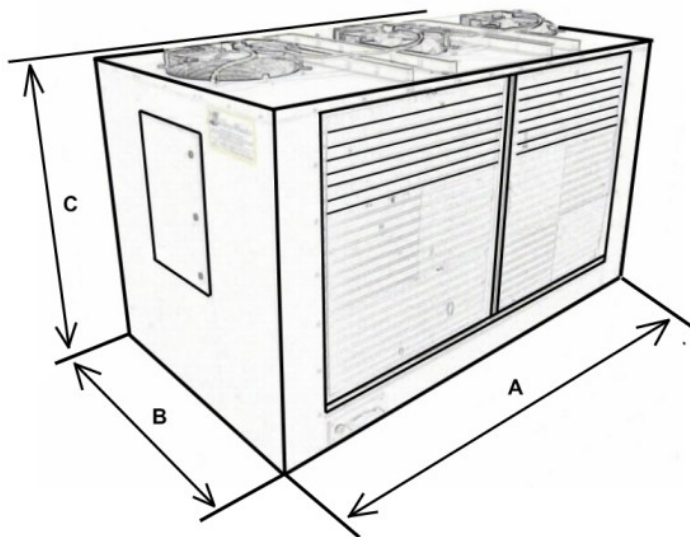

MODEL		0010	0015	0020	0030	0035	0040	0050	0055	0060	0063	0065	0067	0070	0071	0075
WIDTH A	mm	1400	1400	1400	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
DEPHT B	mm	800	800	800	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
HEIGHT C	mm	1000	1000	1000	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600

MODEL		0080	0085	0095	0100	0105	0110	0125	0130	0140	0160	0170	0190	0215	0260
WIDTH A	mm	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
DEPHT B	mm	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
HEIGHT C	mm	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300

THE TECHNICAL DATA IN THIS DOCUMENT ARE NOT BINDING . DALMACIJA KLIMA RESERVES THE RIGHT TO MAKE WHATEVER MODIFICATIONS IT DEEMS NECESSARY TO IMPROVE THE PRODUCT AT ANY TIME.



Dalmacija Klima d.o.o.

AIR TO AIR CHILLERS

CONFIGURATION RULES

RU ZZ xxxx 3 4 5 6 L 8 9 10 11

1. TYPE

ZZ AIR-AIR
VZ WATER-AIR
VV WATER-WATER
RT WATER-TOWER

2. COOLING CAPACITY

COOLING CAPACITY (kw)

3. VERSION

° STANDARD
T SILENCED

4. COMPRESSOR TYPE

S SCROLL
H HERMETIC

5. FAN TYPE

A AXIAL
R RADIAL

11. REACTIVE POWER

° WITHOUT COMPENSATION
J WITH COMPENSATION

10. CONTROL

° CONTROL PANEL
N REMOTE CONTROL

9. HYDRO BLOCK

° WITHOUT HYDRO BLOCK

8. HEAT RECOVERY

° WITHOUT RECUPERATORS
D WITH PARTIAL RECUPERATORS
M WITH TOTAL RECUPERATORS

7. HEAT EXCHANGER IN PRIMARY CIRCUIT

L FINNED

6. REFRIGERANT TYPE

1 134
2 407 C
3 410A

Commercial code example:

RU ZZ 0650A2LMN

This is air to air chiller with 650 kW cooling capacity, low noise type with semihermetic compressor, axial fans, refrigerant R407 C, fined heat exchanger in primary circuit, with total recuperators, without hydro block, with remote control and without reactive power compensation.



Dalmacija Klima d.o.o.

AIR TO WATER CHILLERS

TECHNICAL SPECIFICATIONS

MODEL		0010	0015	0020	0030	0035	0040	0050	0065	0055	0070
COOLING CAPACITY	kW	10,78	15,82	19,46	27,83	34,43	42,37	53,81	64,32	55,66	68,86
NUMBER OF FREON CIRCUITS	No	1	1	1	1	1	1	1	1	1/2	1/2
NUMBER OF COMPRESSORS	No	1	1	1	1	1	1	1	1	2	2
FANS NUMBER	No	1	1	1	1	2	2	2	2	2	3
WATER FLOW RATE	l/h	1854	2721	3892	5566	6873	8458	10762	12865	11132	13746
AIR FLOW RATE	m³/h	3219	6013	7398	10580	13088	16108	20455	24450	21160	26176
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C
PRESSURE DROPS ON EVAPORATOR	bar	0,35	0,35	0,35	0,35	0,35	0,36	0,36	0,36	0,36	0,36
NOISE LEVEL	db	65	65	65	65	65	65	66	66	66	66
TOTAL INPUT POWER	kW	3,32	4,66	6,03	8,55	10,56	13	16,03	19,11	17,1	21,12
WEIGHT	kg	178	187	349	430	499	561	626	719	734	785

MODEL		0085	0105	0130	0060	0067	0080	0100	0125	0160	0190
COOLING CAPACITY	kW	84,74	107,62	128,64	58,38	67,32	83,49	103,29	127,11	161,43	192,96
NUMBER OF FREON CIRCUITS	No	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
NUMBER OF COMPRESSORS	No	2	2	2	3	3	3	3	3	3	3
FANS NUMBER	No	3	3	4							
WATER FLOW RATE	l/h	16916	21524	25830	10041	11579	14358	17763	21861	27762	33186
AIR FLOW RATE	m³/h	32216	40910	48900	12630	20102	32604	40338	49641	63000	75357
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C
PRESSURE DROPS ON EVAPORATOR	bar	0,37	0,37	0,38	0,36	0,36	0,36	0,37	0,37	0,38	0,39
NOISE LEVEL	db	66	67	67	65	66	66	67	67	68	68
TOTAL INPUT POWER	kW	26	32,06	38,22	18,09	22,32	25,65	31,8	39	48,09	57,33
WEIGHT	kg	988	1200	1287	964	994	1312	1318	1438	2058	2880

MODEL		0063	0071	0075	0095	0110	0140	0170	0215	0260
COOLING CAPACITY	kW	63,28	71,52	77,84	96,08	111,3	137,72	169,5	215,2	257,3
NUMBER OF FREON CIRCUITS	No	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
NUMBER OF COMPRESSORS	No	4	4	4	4	4	4	4	4	4
FANS NUMBER	No									
WATER FLOW RATE	l/h	10884	12301	13388	16525	19143	23684	29148	37016	44248
AIR FLOW RATE	m³/h	18896	21356	23241	28689	33233	41115	50600	64260	76315
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C
PRESSURE DROPS ON EVAPORATOR	bar	0,36	0,26	0,36	0,37	0,37	0,37	0,38	0,39	0,40
NOISE LEVEL	db	65	66	66	66	66	67	67	68	68
TOTAL INPUT POWER	kW	18,64	21,44	24,12	29,76	34,2	42,24	52	64,24	76,44
WEIGHT	kg	1145	1278	1330	1495	1535	1596	2376	3323	3537



Dalmacija Klima d.o.o.

AIR TO WATER CHILLERS

TECHNICAL SPECIFICATIONS

MODEL		0165	0325	0490	0650	0810	0975	1140	1300
COOLING CAPACITY	kW	162,5	325	487,5	650	812,5	975	1137,5	1300
NUMBER OF FREON CIRCUITS	No	1	1/2	1/2	1/2	1/2	1/2	1/2	1/2
NUMBER OF COMPRESSORS	No	1	2	3	4	5	6	7	8
FANS NUMBER	No								
WATER FLOW RATE	l/h	27950	55900	83850	111800	139750	167700	195650	223600
AIR FLOW RATE	m³/h	48524	97048	145572	194096	242620	291144	339668	388192
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C
PRESSURE DROPS ON EVAPORATOR	bar	0,38	0,40	0,40	0,41	0,41	0,42	0,43	0,44
NOISE LEVEL	db	67	68	68	68	68	68	68	68
TOTAL INPUT POWER	kW								
WEIGHT	kg								

OPTIONS AND ACCESSORIES

MODEL		0010	0015	0020	0030	0035	0040	0050	0055	0060	0063	0065	0067
LOW NOISE VERSION	T	•	•	•	•	•	•	•	•	•	•	•	•
HERMETIC COMPRESSOR	H	•	•	•	•	•	•	•	•	•	•	•	•
SEMI-HERMETIC COMPRESSOR		•	•	•	•	•	•	•	•	•	•	•	•
AXIAL FANS	A	X	X	X	X	X	X	X	X	X	X	X	X
RADIAL FANS	R	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R134A	1	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R407C	2	X	X	X	X	X	X	X	X	X	X	X	X
REFRIGERANT R410A	3	•	•	•	•	•	•	•	•	•	•	•	•
PLATE HEAT EXCHANGER IN PRIMARY CIRCUIT	P	•	•	•	•	•	•	•	•	•	•	•	•
FINNED HEAT EXCHANGER IN PRIMARY CIRCUIT	L	•	•	•	•	•	•	•	•	•	•	•	•
TUBE HEAT EXCHANGER IN PRIMARY CIRCUIT	C	X	X	X	X	X	X	X	X	X	X	X	X
WITH PARTIAL RECUPERATORS	D	•	•	•	•	•	•	•	•	•	•	•	•
WITH TOTAL RECUPERATORS	M	•	•	•	•	•	•	•	•	•	•	•	•
WITH HYDRO BLOCK	B	•	•	•	•	•	•	•	•	•	•	•	•
REMOTE CONTROL PANEL	N	•	•	•	•	•	•	•	•	•	•	•	•
WITH REACTIVE POWER COMPENSATOR	J	•	•	•	•	•	•	•	•	•	•	•	•

- X STANDARD**
• ACCESSORIES



Dalmacija Klima d.o.o.

AIR TO WATER CHILLERS

OPTIONS AND ACCESSORIES

MODEL		0070	0071	0075	0080	0085	0095	0100	0105	0110	0125	0130	0140
LOW NOISE VERSION	T	•	•	•	•	•	•	•	•	•	•	•	•
HERMETIC COMPRESSOR	H	•	•	•	•	•	•	•	•	•	•	•	•
SEMI-HERMETIC COMPRESSOR		•	•	•	•	•	•	•	•	•	•	•	•
AXIAL FANS	A	X	X	X	X	X	X	X	X	X	X	X	X
RADIAL FANS	R	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R134A	1	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R407C	2	X	X	X	X	X	X	X	X	X	X	X	X
REFRIGERANT R410A	3	•	•	•	•	•	•	•	•	•	•	•	•
PLATE HEAT EXCHANGER IN PRIMARY CIRCUIT	P	•	•	•	•	•	•	•	•	•	•	•	•
FINNED HEAT EXCHANGER IN PRIMARY CIRCUIT	L	•	•	•	•	•	•	•	•	•	•	•	•
TUBE HEAT EXCHANGER IN PRIMARY CIRCUIT	C	X	X	X	X	X	X	X	X	X	X	X	X
WITH PARTIAL RECUPERATORS	D	•	•	•	•	•	•	•	•	•	•	•	•
WITH TOTAL RECUPERATORS	M	•	•	•	•	•	•	•	•	•	•	•	•
WITH HYDRO BLOCK	B	•	•	•	•	•	•	•	•	•	•	•	•
REMOTE CONTROL PANEL	N	•	•	•	•	•	•	•	•	•	•	•	•
WITH REACTIVE POWER COMPENSATOR	J	•	•	•	•	•	•	•	•	•	•	•	•

MODEL		0160	0170	0190	0215	0260
LOW NOISE VERSION	T	•	•	•	•	•
HERMETIC COMPRESSOR	H	•	•	•	•	•
SEMI-HERMETIC COMPRESSOR		•	•	•	•	•
AXIAL FANS	A	X	X	X	X	X
RADIAL FANS	R	•	•	•	•	•
REFRIGERANT R134A	1	•	•	•	•	•
REFRIGERANT R407C	2	X	X	X	X	X
REFRIGERANT R410A	3	•	•	•	•	•
PLATE HEAT EXCHANGER IN PRIMARY CIRCUIT	P	•	•	•	•	•
FINNED HEAT EXCHANGER IN PRIMARY CIRCUIT	L	•	•	•	•	•
TUBE HEAT EXCHANGER IN PRIMARY CIRCUIT	C	X	X	X	X	X
WITH PARTIAL RECUPERATORS	D	•	•	•	•	•
WITH TOTAL RECUPERATORS	M	•	•	•	•	•
WITH HYDRO BLOCK	B	•	•	•	•	•
REMOTE CONTROL PANEL	N	•	•	•	•	•
WITH REACTIVE POWER COMPENSATOR	J	•	•	•	•	•


- X STANDARD**
• ACCESSORIES



Dalmacija Klima d.o.o.

AIR TO WATER CHILLERS

DIMENSIONS

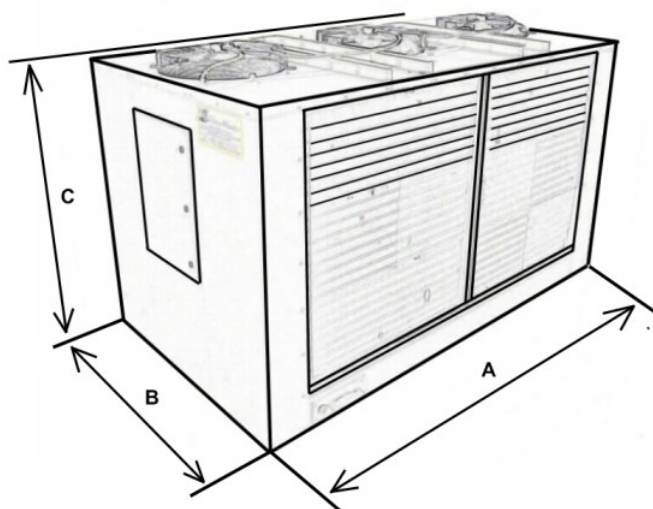

MODEL		0010	0015	0020	0030	0035	0040	0050	0055	0060	0063	0065	0067	0070	0071	0075
WIDTH A	mm	1400	1400	1400	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
DEPHT B	mm	800	800	800	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
HEIGHT C	mm	1000	1000	1000	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600

MODEL		0080	0085	0095	0100	0105	0110	0125	0130	0140	0160	0170	0190	0215	0260
WIDTH A	mm	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
DEPHT B	mm	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
HEIGHT C	mm	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300



Dalmacija Klima d.o.o.

AIR TO WATER CHILLERS

CONFIGURATION RULES

RU ZV xxxx 3 4 5 6 7 8 9 10 11

1. TYPE

ZZ AIR-AIR
VZ WATER-AIR
VV WATER-WATER
RT WATER-TOWER

2. COOLING CAPACITY

COOLING CAPACITY (kw)

3. VERSION

° STANDARD
T SILENCED

4. COMPRESSOR TYPE

S SCROLL
H HERMETIC
 ° SEMI-HERMETIC

5. FAN TYPE

A AXIAL
R RADIAL

11. REACTIVE POWER

° WITHOUT COMPENSATION
J WITH COMPENSATION

10. CONTROL

° CONTROL PANEL
N REMOTE CONTROL

9. HYDRO BLOCK

° WITHOUT HYDRO BLOCK
B WITH HYDRO BLOCK

8. HEAT RECOVERY

° WITHOUT RECUPERATORS
D WITH PARTIAL RECUPERATORS
M WITH TOTAL RECUPERATORS

7. HEAT EXCHANGER IN PRIMARY CIRCUIT

L FINNED
P PLATE
C TUBE


6. REFRIGERANT TYPE

1 134
2 407 C
3 410A

Commercial code example:

RU ZV 0650SA2CMN

This is air to water chiller with 650 kW cooling capacity, standard version, with scroll compressors, axial fans, refrigerant 407 C, tube heat exchangers in primary circuit, with total recuperators, without hydro block, with remote control and without reactive power compensation.

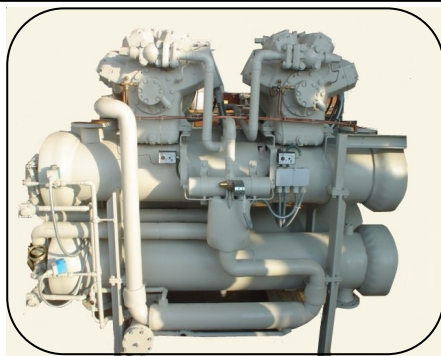

Dalmacija Klima d.o.o.

WATER TO WATER CHILLERS


TECHNICAL SPECIFICATIONS

MODEL		0020	0025	0030	0035	0045	0057	0068	0028	0040	0050	0060
COOLING CAPACITY	kW	20,76	25,60	29,66	36,73	45,02	57,19	68,15	28,46	41,52	51,2	59,32
NUMBER OF FREON CIRCUITS	No	1	1	1	1	1	1	1	1/2	1/2	1/2	1/2
NUMBER OF COMPRESSORS	No	1	1	1	1	1	1	1	2	2	2	2
WATER FLOW RATE IN PRIMARY CIRCUIT EXCHANGER	l/h	4300	5418	6268	7766	9527	12031	14357	6000	8600	10836	12536
WATER FLOW RATE IN SECONDARY CIRCUIT EXCHANGER	l/h	3570	4403	5101	6317	7743	9837	11722	4895	7141	8806	10203
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C
PRESSURE DROP ON PRIMARY CIRCUIT EXCHANGER	bar	0,35	0,35	0,35	0,35	0,36	0,36	0,36	0,35	0,36	0,36	0,36
PRESSURE DROP ON SECONDARY CIRCUIT EXCHANGER	bar	0,35	0,35	0,35	0,35	0,35	0,36	0,36	0,35	0,35	0,36	0,36
TOTAL INPUT POWER	kW	7,11	8,78	10,01	12,51	15,34	18,92	22,55	9,56	14,22	17,56	20,18
WEIGHT	kg	168	224	236	256	312	355	419	217	322	393	449

MODEL		0070	0090	0115	0136	0043	0062	0075	0080	0110	0135	0170
COOLING CAPACITY	kW	73,46	90,04	114,38	136,3	42,69	62,28	76,8	88,98	110,19	135,06	171,57
NUMBER OF FREON CIRCUITS	No	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
NUMBER OF COMPRESSORS	No	2	2	2	2	3	3	3	3	3	3	3
WATER FLOW RATE IN PRIMARY CIRCUIT EXCHANGER	l/h	15532	19054	24062	28714	9000	12900	16254	18804	23298	28581	36093
WATER FLOW RATE IN SECONDARY CIRCUIT EXCHANGER	l/h	12634	15488	19673	23444	7342	10710	13209	15303	18951	23229	29511
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C
PRESSURE DROP ON PRIMARY CIRCUIT EXCHANGER	bar	0,36	0,37	0,38	0,38	0,36	0,36	0,37	0,37	0,37	0,38	0,39
PRESSURE DROP ON SECONDARY CIRCUIT EXCHANGER	bar	0,36	0,36	0,37	0,37	0,35	0,36	0,36	0,36	0,37	0,37	0,38
TOTAL INPUT POWER	kW	25,02	30,68	37,76	45,10	14,34	21,35	26,34	30,27	37,52	46,02	56,75
WEIGHT	kg	489	542	680	820	367	413	471	583	710	930	1079

MODEL		0205	0056	0085	0105	0120	0145	0180	0230	0270		
COOLING CAPACITY	kW	204,45	56,92	83,04	102,4	118,64	146,92	180	228,76	272,6		
NUMBER OF FREON CIRCUITS	No	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2		
NUMBER OF COMPRESSORS	No	3	4	4	4	4	4	4	4	4		
WATER FLOW RATE IN PRIMARY CIRCUIT EXCHANGER	l/h	43071	12000	17200	21672	25072	31064	38108	48124	57428		
WATER FLOW RATE IN SECONDARY CIRCUIT EXCHANGER	l/h	35166	9790	14280	17612	20404	25264	30972	39348	46888		
REFRIGERANT		R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C	R407C		
PRESSURE DROP ON PRIMARY CIRCUIT EXCHANGER	bar	0,40	0,36	0,37	0,37	0,38	0,38	0,39	0,41	0,43		
PRESSURE DROP ON SECONDARY CIRCUIT EXCHANGER	bar	0,39	0,36	0,36	0,37	0,37	0,38	0,38	0,39	0,41		
TOTAL INPUT POWER	kW	67,65	19,12	28,46	35,12	40,36	50,03	61,36	75,66	90,20		
WEIGHT	kg	1256	692	786	853	924	1057	1204	1554	1792		

THE TECHNICAL DATA IN THIS DOCUMENT ARE NOT BINDING . DALMACIJA KLIMA RESERVES THE RIGHT TO MAKE WHATEVER MODIFICATIONS IT DEEMS NECESSARY TO IMPROVE THE PRODUCT AT ANY TIME.

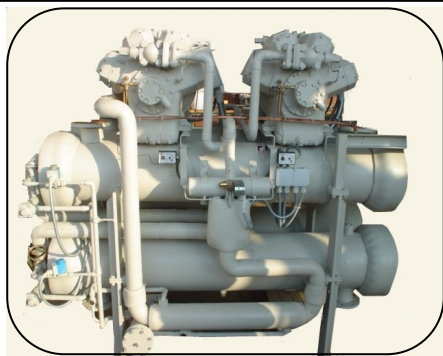

Dalmacija Klima d.o.o.

WATER TO WATER CHILLERS


OPTIONS AND ACCESSORIES

MODEL		0020	0025	0028	0030	0035	0040	0043	0045	0050	0056	0057	0060
HERMETIC COMPRESSOR	H	•	•	•	•	•	•	•	•	•	•	•	•
SEMI-HERMETIC COMPRESSOR		•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R134A	1	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R407C	2	X	X	X	X	X	X	X	X	X	X	X	X
REFRIGERANT R410A	3	•	•	•	•	•	•	•	•	•	•	•	•
PLATE HEAT EXCHANGER IN PRIMARY CIRCUIT	P	•	•	•	•	•	•	•	•	•	•	•	•
FINNED HEAT EXCHANGER IN PRIMARY CIRCUIT	L	•	•	•	•	•	•	•	•	•	•	•	•
TUBE HEAT EXCHANGER IN PRIMARY CIRCUIT	C	X	X	X	X	X	X	X	X	X	X	X	X
WITH PARTIAL RECUPERATORS	D	•	•	•	•	•	•	•	•	•	•	•	•
WITH TOTAL RECUPERATORS	M	•	•	•	•	•	•	•	•	•	•	•	•
REMOTE CONTROL PANEL	N	•	•	•	•	•	•	•	•	•	•	•	•
WITH REACTIVE POWER COMPENSATOR	J	•	•	•	•	•	•	•	•	•	•	•	•

MODEL		0062	0068	0070	0075	0080	0085	0090	0105	0110	0115	0120	0135
HERMETIC COMPRESSOR	H	•	•	•	•	•	•	•	•	•	•	•	•
SEMI-HERMETIC COMPRESSOR		•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R134A	1	•	•	•	•	•	•	•	•	•	•	•	•
REFRIGERANT R407C	2	X	X	X	X	X	X	X	X	X	X	X	X
REFRIGERANT R410A	3	•	•	•	•	•	•	•	•	•	•	•	•
PLATE HEAT EXCHANGER IN PRIMARY CIRCUIT	P	•	•	•	•	•	•	•	•	•	•	•	•
FINNED HEAT EXCHANGER IN PRIMARY CIRCUIT	L	•	•	•	•	•	•	•	•	•	•	•	•
TUBE HEAT EXCHANGER IN PRIMARY CIRCUIT	C	X	X	X	X	X	X	X	X	X	X	X	X
WITH PARTIAL RECUPERATORS	D	•	•	•	•	•	•	•	•	•	•	•	•
WITH TOTAL RECUPERATORS	M	•	•	•	•	•	•	•	•	•	•	•	•
REMOTE CONTROL PANEL	N	•	•	•	•	•	•	•	•	•	•	•	•
WITH REACTIVE POWER COMPENSATOR	J	•	•	•	•	•	•	•	•	•	•	•	•

MODEL		0136	0145	0170	0180	0205	0230	0270
HERMETIC COMPRESSOR	H	•	•	•	•	•	•	•
SEMI-HERMETIC COMPRESSOR		•	•	•	•	•	•	•
REFRIGERANT R134A	1	•	•	•	•	•	•	•
REFRIGERANT R407C	2	X	X	X	X	X	X	X
REFRIGERANT R410A	3	•	•	•	•	•	•	•
PLATE HEAT EXCHANGER IN PRIMARY CIRCUIT	P	•	•	•	•	•	•	•
FINNED HEAT EXCHANGER IN PRIMARY CIRCUIT	L	•	•	•	•	•	•	•
TUBE HEAT EXCHANGER IN PRIMARY CIRCUIT	C	X	X	X	X	X	X	X
WITH PARTIAL RECUPERATORS	D	•	•	•	•	•	•	•
WITH TOTAL RECUPERATORS	M	•	•	•	•	•	•	•
REMOTE CONTROL PANEL	N	•	•	•	•	•	•	•
WITH REACTIVE POWER COMPENSATOR	J	•	•	•	•	•	•	•


X STANDARD
• ACCESSORIES

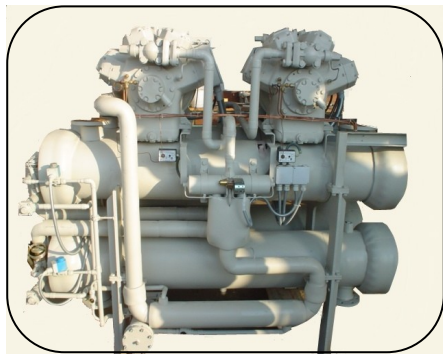

Dalmacija Klima d.o.o.


WATER TO WATER CHILLERS

DIMENSIONS

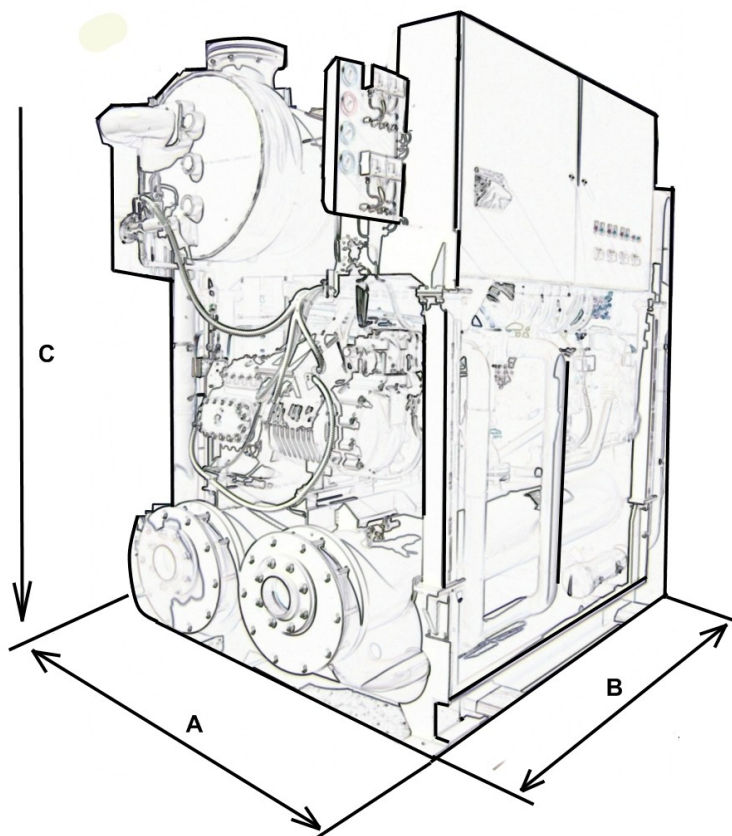

MODEL		0020	0025	0028	0030	0035	0040	0043	0045	0050	0056	0057	0060	0062	0068	0070	0075
WIDTH A	mm	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650	1650
DEPHT B	mm	550	550	550	550	550	550	550	550	550	550	550	750	750	750	750	750
HEIGHT C	mm	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1400	1400	1400	1400	1400

MODEL		0080	0085	0090	0105	0110	0115	0120	0135	0136	0145	0170	0180	0205	0230	0270
WIDTH A	mm	1650	2050	2050	3050	3050	3050	3050	3050	3050	3050	3050	3050	3050	3050	3050
DEPHT B	mm	750	750	750	750	750	750	750	750	750	750	880	880	880	880	880
HEIGHT C	mm	1400	1400	1400	1400	1400	1600	1600	1600	1600	1600	1700	1700	1700	1700	1700

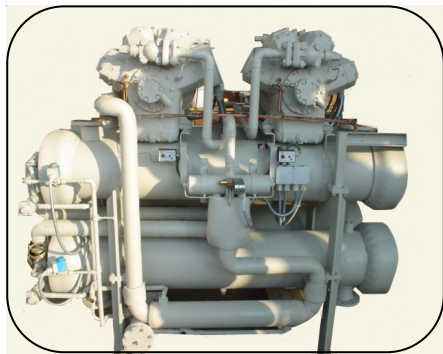

Dalmacija Klima d.o.o.

WATER TO WATER CHILLERS

CONFIGURATION RULES

RU VV xxxx 3 4 5 6 7 8 9 10 11

1. TYPE

ZZ AIR-AIR
VZ WATER-AIR
VV WATER-WATER
RT WATER-TOWER

2. COOLING CAPACITY

COOLING CAPACITY (kw)

3. VERSION

° STANDARD

4. COMPRESSOR TYPE

S SCROLL
H HERMETIC
 ° SEMI-HERMETIC

5. FAN TYPE

° NO FAN

11. REACTIVE POWER

° WITHOUT COMPENSATION
J WITH COMPENSATION

10. CONTROL

° CONTROL PANEL
N REMOTE CONTROL

9. HYDRO BLOCK

° WITHOUT HYDRO BLOCK

8. HEAT RECOVERY

° WITHOUT RECUPERATORS
D WITH PARTIAL RECUPERATORS
M WITH TOTAL RECUPERATORS

7. HEAT EXCHANGER IN PRIMARY CIRCUIT

L FINNED
P PLATE
C TUBE

6. REFRIGERANT TYPE

1 134
2 407 C
3 410A

Commercial code example:

RU VV 0650 S2CMN

This is water to water chiller with 650 kW cooling capacity, standard version, with scroll compressors, refrigerant 407 C, tube heat exchanger in primary circuit, with total recuperators, without hydro block, with remote control and without reactive power compensation.



E-mail: mail@dalmacija-klima.com



Web: www.dalmacija-klima.com